



RVS Master™ Bearing & Chain Grease

Application Instructions


- RVS Master™ Bearing & Chain grease is specifically formulated for the treatment of “dry” metal parts under friction which are not already lubricated with oil. RVS Master™ creates a durable nano-ceramic layer on all metal parts under friction, reducing heat and friction, reducing noise and vibrations, and extending their life.
- One RVS Master™ Grease is ideal for use on bearings of all types, chains, sprockets, and other metal parts under constant friction.

Note: Do not skip any of the steps in the following procedure. Doing so can significantly diminish your results.


Treatment Procedure



Shake Bottle well until there is no more residue on bottom of bottle

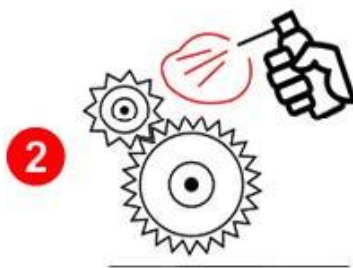

Spray grease on all metal moving parts in contact with each other. You don't have to use up all of the bottle at once – leave some for repeat treatments if necessary.

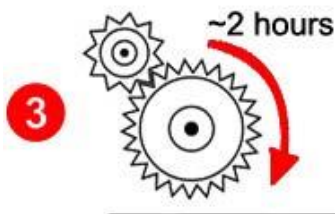

Operate the equipment right away for at least 2 hours. Repeat process periodically as needed.

Storage and safety instructions

Store at temperatures below +40 °C (105 °F). In case of skin contact, wash with lukewarm water and soap. If the product gets in your eyes, it may cause irritation – flush with water and consult a doctor if the irritation continues. If the product is swallowed, flush the mouth with water and consult a doctor. Do not induce vomiting! Keep product out of reach of children.